




Installation Instructions

SPACEDEC

DISPLAY
POS Multi Back to Back


Component Checklist

NOTE: Check you have received all parts below.

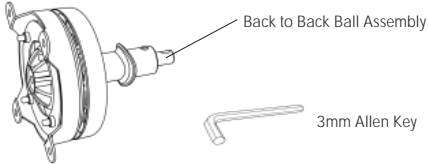


A Remove Top Cap (if installed)

A.1. If the Top Cap has been installed, remove the Top Cap using a small screw driver (be careful not to damage the cap).




B Undo and Remove Back Pin

B.1. Using the 3mm Allen Key, un-do the Grub Screw as shown. (NOTE: This will be very tight)

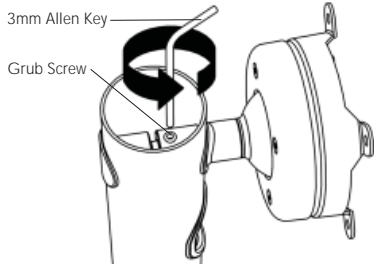


B.2. Remove the Back Pin but keep the Grub Screw for use later on.

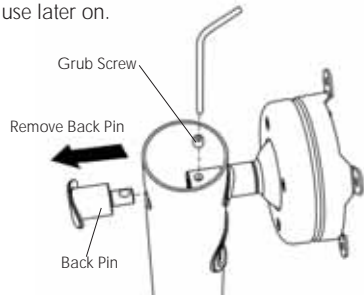


C Install Back to Back Ball Assembly

C.1. Use the Grub Screw to Install the Back to Back Ball Assembly. Ensure the Recess (shown) lines up with the Grub Screw before tightening.

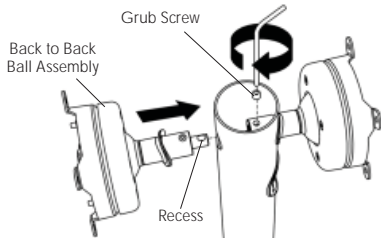

C.2. Ensure both Grub Screws are tightened as firmly as possible.

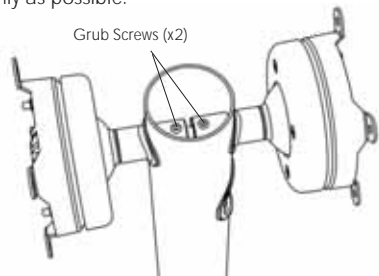

NOTE: Refer to the POS Multi Installation Instructions to finish Installation

