

# TELEHOOK<sup>®</sup>

## Technical Specifications


### 12-24 Wall Mount

### Technical Specifications

**! IMPORTANT: Please read these instructions before commencing installation as faulty installation could be dangerous**

! Telehook 12-24 supports 12" (30cm) to 24" (61cm) display weighing up to 11kg (24.4lbs)


! It is dangerous to overload the product

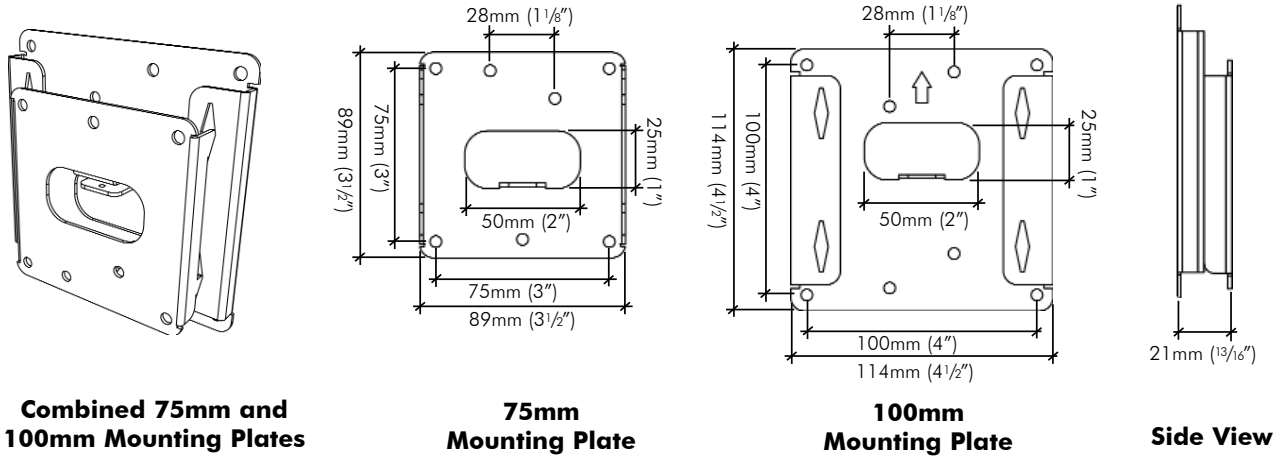


### Mounting Options (Bolt Patterns)

Mounting hole pattern for:  
**Drywall, Brick, and Masonry Walls**

Mounting hole pattern for:  
**Timber Stud - ONLY**

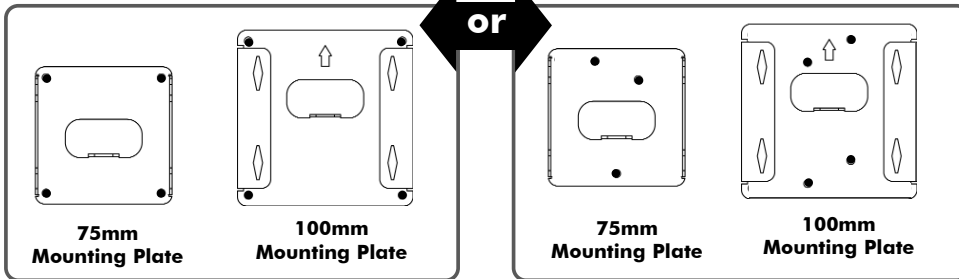


### Security




Protruding tabs screwed together for additional security

### Suits VESA hole Patterns

Telehook 12-24 suits displays with 100mm x 100mm (4" x 4") or 75mm x 75mm (3" x 3") VESA mounting hole patterns.

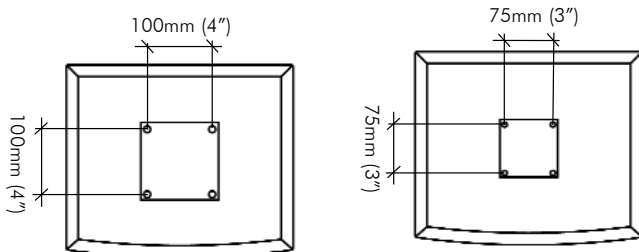

### Cable Management



If required, feed the monitors cables through the Cable Management Hole in the mounting plate.

Cable Management Hole



the visual display mounting company